




## MPO Loopback Patch Cord

### Features

- ◆ SM or MM available; PC(plane) or APC(8 degree) available
  - ◆ Different IL index and various color available
  - ◆ Stable performance index by PIN fixed position of connecting
  - ◆ Standard Fiber arrangement or customized
  - ◆ Plug type connector with locking structure
  - ◆ High density which convenient for wiring and management system
- Comply with Telcordia GR-1435-CORE and RoHS standard

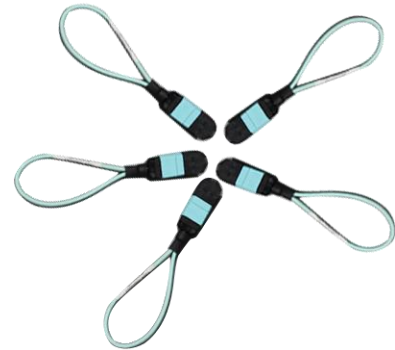

### Applications

- ◆ telecom network
- ◆ System cabling
- ◆ Precision telecom equipments
- ◆ Cable loopback inspection

### Specifications

Type	Single mode	Multi mode
Fiber Diameter	9/125um	50/125um, 62.5/125um
Insertion loss	<0.3dB <0.5dB <0.7dB	<0.5dB <0.7dB
Return loss	>60dB	>30dB
Insert-pull test	500 times <0.5 dB	
Operation temperature	-40°C ~ +80°C	
Tensile Resistance	15kgf	

### Ordering Information:

1. Supply SM,MM, Simplex connector
2. Supply 4,8,12,24 cores connector
3. MPO male pin available ( SM or MM )